


ESG 39

FOR FLOORS WITH HYGIENIC REQUIREMENTS, RESISTANT TO AGGRESSIVE FLUIDS

MIGUTEK

JOINT COVERS FOR EXPANSION JOINTS

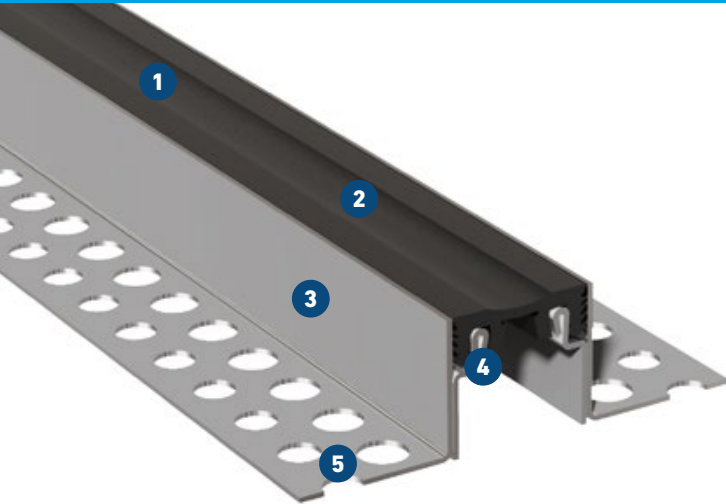

- 1 Flexible high quality elastomeric insert**
Hard wearing, temperature resistant (-30°C to +120°C), replaceable
- 2 Smooth visible surface for easy cleaning**
Antibacterial and physiologically safe
- 3 Solid stainless steel brackets**
Resistant to aggressive media (e.g. sea water)
- 4 Multi directional movement**
- 5 MultiHole mounting bracket**
for secure fixing

Expansion joint cover	Joint width	Total movement	Visible width	Total width	Joint height	Load bearing capacity* [kN]	Load bearing capacity* [kN]
	$b_f \text{ max}$ [mm]	Δb_f [mm]	b_s [mm]	b_t [mm]	h [mm]		
ESG 39/15	35	6 (± 3)	39	145	15	30	30
ESG 39/35	35	6 (± 3)	39	114	35	30	30
ESG 39/40	35	6 (± 3)	39	114	40	30	30
ESG 39/50	35	6 (± 3)	39	114	50	30	30

* no continuous use

All information on load bearing capacity does only apply to non-floating floors.

For installation in asphalt, please ask for our technical advice.

Larger installation heights on request.

Material: 1.4301 (alloy 304)

Production length: 3 m (ESG 39/15: 2 m)

Standard colours: black, grey, beige

Wall connections: E1, E3, E4

